


RLX-III Deadman Handle



This high quality brand belongs to the product group “pressure blast systems”. Only the perfect configuration and match of all system components in a blast machine enable maximum blasting efficiency. Therefore Clemco offers an extensive and complete range of quality products.

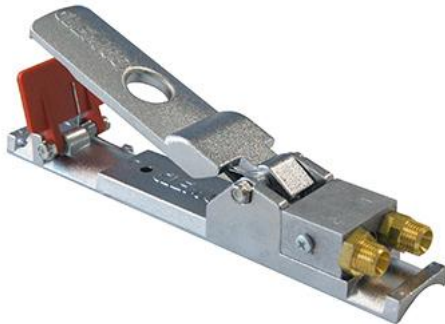

RLX-III Deadman Handle

The RLX-III is a pneumatic remote control for blast machines with a fast reaction time. The double line air system offers a high security standard and still changing the valve is very easy and fast. Our interlock option reduces fatigue of the operators and the optional double function allows additional operating options.

Blasting pressure	0 < > 12 bar
Operating temperature	-15°C < > +50°C
Features	options: interlock and double function

Air volume in m³/min

nozzle orifice	3,5 bar	4,2 bar	4,9 bar	5,6 bar	6,3 bar	7,0 bar	8,6 bar	10,3 bar
5 mm 3/16"	0,73	0,84	0,92	1,06	1,15	1,26	1,54	1,82
6,5 mm ¼"	1,31	1,51	1,71	1,9	2,08	2,27	2,75	3,22
8 mm 5/16"	2,16	2,5	2,83	3,16	3,53	3,84	4,71	5,57
9,5 mm 3/8"	3,02	3,53	4	4,5	4,85	5,5	6,64	7,79
11 mm 7/16"	4,12	4,76	5,44	6,09	6,73	7,11	8,8	10,48
12,5 mm ½"	5,46	6,28	7,06	7,85	8,65	9,46	11,46	13,45

When selecting an air volume, please add 50% to the table values to allow loss for normal nozzle wear and friction.