




Blast Pot CADWB-2460 (300l) Double Chamber Machine

This high quality brand belongs to the product group “pressure blast systems”. Only the perfect configuration and match of all system components in a blast machine enable maximum blasting efficiency. Therefore Clemco offers an extensive and complete range of quality products.

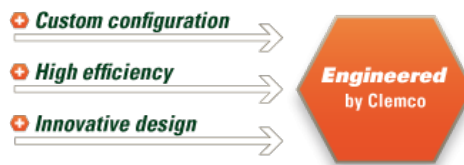

Blast Pot CADWB-2460 (300l) Double Chamber Machine

Up to four operators can use our double chamber blast machines for parallel and independent work. Furthermore the double chamber systems makes it possible to refill the blast machine without interrupting blasting. This makes the system a perfect solution for an automated production and continuous duty.

Area of application	automation continuous operation
Total dimension: W x H x D *	900 x 1750 x 850 mm
Diameter	610 mm
Weight *	300 kg
Tank capacity	2 x 150 l
Abrasive media	suitable for every common media
Blasting pressure	0 < > 12 bar
Operating temperature	0°C < > 50°C
Features	depending on requirements
* +/- Values, may differ depending on configuration, arrangement and function.	

Air volume in m³/min

nozzle orifice	3,5 bar	4,2 bar	4,9 bar	5,6 bar	6,3 bar	7,0 bar	8,6 bar	10,3 bar
5 mm 3/16"	0,73	0,84	0,92	1,06	1,15	1,26	1,54	1,82
6,5 mm ¼"	1,31	1,51	1,71	1,9	2,08	2,27	2,75	3,22
8 mm 5/16"	2,16	2,5	2,83	3,16	3,53	3,84	4,71	5,57
9,5 mm 3/8"	3,02	3,53	4	4,5	4,85	5,5	6,64	7,79
11 mm 7/16"	4,12	4,76	5,44	6,09	6,73	7,11	8,8	10,48
12,5 mm ½"	5,46	6,28	7,06	7,85	8,65	9,46	11,46	13,45

When selecting an air volume, please add 50% to the table values to allow loss for normal nozzle wear and friction.