




Metering Valve PVR

This high quality brand belongs to the product group “pressure blast systems”. Only the perfect configuration and match of all system components in a blast machine enable maximum blasting efficiency. Therefore Clemco offers an extensive and complete range of quality products.

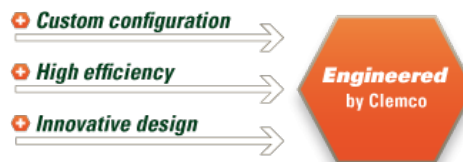

Metering Valve PVR

The PVR is a pneumatic metering valve and suitable for every current media. It is designed especially for operations with a frequent media shut on-/off rate. It provides a permanent pressure to the blast machine that decreases the waiting time for re-starting the machine.

Minimum air pressure	5,6 bar
Maximum air pressure	12 bar
Abrasive media	suitable for every common media
Blasting pressure	0 < > 12 bar

Air volume in m³/min

nozzle orifice	3,5 bar	4,2 bar	4,9 bar	5,6 bar	6,3 bar	7,0 bar	8,6 bar	10,3 bar
5 mm 3/16"	0,73	0,84	0,92	1,06	1,15	1,26	1,54	1,82
6,5 mm ¼"	1,31	1,51	1,71	1,9	2,08	2,27	2,75	3,22
8 mm 5/16"	2,16	2,5	2,83	3,16	3,53	3,84	4,71	5,57
9,5 mm 3/8"	3,02	3,53	4	4,5	4,85	5,5	6,64	7,79
11 mm 7/16"	4,12	4,76	5,44	6,09	6,73	7,11	8,8	10,48
12,5 mm ½"	5,46	6,28	7,06	7,85	8,65	9,46	11,46	13,45

When selecting an air volume, please add 50% to the table values to allow loss for normal nozzle wear and friction.