




Angle Nozzle - CAM Nozzle with 45° outlet

This high quality brand belongs to the product group "pressure blast systems". Only the perfect configuration and match of all system components in a blast machine enable maximum blasting efficiency. Therefore Clemco offers an extensive and complete range of quality products.

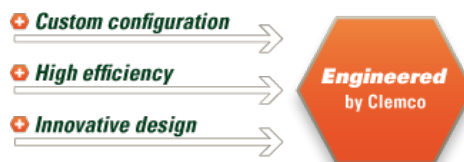

CAM-Blast Nozzle with Outlet Angle 45°; Coarse Thread 50mm

The CAM blast nozzle is made of robust tungsten carbide and allows the operator to blast with an outlet angle of 45°. This makes the nozzle suitable for spots that are difficult to reach and special constructions. The CAM nozzles are available in different nozzle diameters and with up to three outlets in one nozzle.

Nozzle size	4,8 - 9,5mm
-------------	-------------

item #	description	size
91991D	CAM 3 X 1 ANGLE NOZZLE TC	4,8 mm x 1 outlet x 70 mm
91992D	CAM 3 X 2 ANGLE NOZZLE TC	4,8 mm x 2 outlet x 70 mm
91993D	CAM 3 X 3 ANGLE NOZZLE TC	4,8 mm x 3 outlet x 70 mm
99111D	CAM 4 X 1 ANGLE NOZZLE TC	6,5 mm x 1 outlet x 70 mm
91994D	CAM 4 X 2 ANGLE NOZZLE TC	6,5 mm x 2 outlet x 70 mm
99108D	CAM 4 X 3 ANGLE NOZZLE TC	6,5 mm x 3 outlet x 70 mm
99100D	CAM 5 X 1 ANGLE NOZZLE TC	8 mm x 1 outlet x 70 mm
91995D	CAM 5 X 2 ANGLE NOZZLE TC	8 mm x 2 outlet x 70 mm
99109D	CAM 5 X 3 ANGLE NOZZLE TC	8 mm x 3 outlet x 70 mm
99101D	CAM 6 X 1 ANGLE NOZZLE TC	9,5 mm x 1 outlet x 70 mm
91996D	CAM 6 X 2 ANGLE NOZZLE TC	9,5 mm x 2 outlet x 70 mm
99110D	CAM 6 X 3 ANGLE NOZZLE TC	9,5 mm x 3 outlet x 70 mm

Air volume in m³/min

nozzle orifice	3,5 bar	4,2 bar	4,9 bar	5,6 bar	6,3 bar	7,0 bar	8,6 bar	10,3 bar
5 mm 3/16"	0,73	0,84	0,92	1,06	1,15	1,26	1,54	1,82
6,5 mm 1/4"	1,31	1,51	1,71	1,9	2,08	2,27	2,75	3,22
8 mm 5/16"	2,16	2,5	2,83	3,16	3,53	3,84	4,71	5,57
9,5 mm 3/8"	3,02	3,53	4	4,5	4,85	5,5	6,64	7,79
11 mm 7/16"	4,12	4,76	5,44	6,09	6,73	7,11	8,8	10,48
12,5 mm 1/2"	5,46	6,28	7,06	7,85	8,65	9,46	11,46	13,45

When selecting an air volume, please add 50% to the table values to allow loss for normal nozzle wear and friction.